

# CITILux

*With High Quality Lens & Japan Led*

## Street Light

### LED 20-40-60-80 W



#### CTL-STT-20-CZ

3 Pcs High Power Japan LED

High Quality Lens

>20 W

2000 Lm

3000 K / 5000 K

60° x 170°

110 - 240 V AC

50 Hz

-30° C ... 60° C

Ultra Slim Body w/ Aluminum and Tempered Glass

40000 Hours

Ra >80

IP 66

3000 Gr

L : 370 mm, W : 200 mm, H : 50 mm



#### CTL-STT-40-CZ

6 Pcs High Power Japan LED

High Quality Lens

>40 W

4000 Lm

3000 K / 5000 K

60° x 170°

110 - 240 V AC

50 Hz

-30° C ... 60° C

Ultra Slim Body w/ Aluminum and Tempered Glass

40000 Hours


Ra >80

IP 66

3000 Gr

L : 370 mm, W : 200 mm, H : 50 mm

Light Source  
Focusing Lens  
Lamp Total Power  
Luminous Flux  
Color Temperature  
Beam Angle  
Input Voltage  
Frequency  
Working Environment  
Lamp Body  
Working Lifetime  
Color Rendering Index  
IP Rating  
Weight  
Dimension

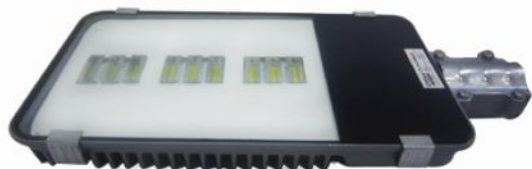

#### CTL-STT-60-CZ

9 Pcs High Power Japan LED

High Quality Lens

>60 W

6000 Lm

3000 K / 5000 K

60° x 170°

110 - 240 V AC

50 Hz

-30° C ... 60° C

Ultra Slim Body w/ Aluminum and Tempered Glass

40000 Hours

Ra >80

IP 66

5500 Gr

L : 450 mm, W : 250 mm, H : 60 mm



#### CTL-STT-80-CZ

12 Pcs High Power Japan LED

High Quality Lens

>80 W

8000 Lm

3000 K / 5000 K

60° x 170°

110 - 240 V AC

50 Hz

-30° C ... 60° C

Ultra Slim Body w/ Aluminum and Tempered Glass

40000 Hours

Ra >80

IP 66

5500 Gr

L : 450 mm, W : 250 mm, H : 60 mm

Light Source  
Focusing Lens  
Lamp Total Power  
Luminous Flux  
Color Temperature  
Beam Angle  
Input Voltage  
Frequency  
Working Environment  
Lamp Body  
Working Lifetime  
Color Rendering Index  
IP Rating  
Weight  
Dimension